Two alunimum door Series

2U two door / two keylock stylish chassis





Introduction

KI-N240S is a compact chassis with 16.7" depth ,1*5.25+4*3.5 drivebay space for wide range application,Support ATX PS2 powersupply for regular server,Two door/two keylock provide the best security,3*6025 fan for best cooling

Features and Benefits

- Support Micro ATX or Mini ITX M/B
- 1*5.25"+1*3.5"(External)+3*3.5"(Internal) drive bay
- Aluminum Alloy front door,both are lockable, Air filter are Removable & Washable
- Front access USB2.0*2
- Standard PS-2 ATX PSU wide range select
- 3*6cm fan for best cooling with optional fan speed controller






Specification

Dimension (W*H*D)	19"*3.5"*16.7"/ 482*88.9*425(mm)
Material Construction	Aluminum two front door+two keylock, Heavy-duty & Rugged Steel 1.2m
M/B Size	9.6" x 9.6" (micro-ATX) / 7" x 7"(mini itx)
Expansion	4slots low profile
Control & Indicator	1*Power switch +1* Reset switch 1 x LED (power) +1 x LED (HDD) 2*2.0 USB
Cooling Fans	3*6cm Fan in front
	3-speed fan controller(optional)
DriveBay	1*5.25"+1*3.5"(External)+3*3.5"(Internal) with anti-shock rubber feet

Power Supply	Standard PS-2 ATX Power Supply(wide range support,upside or down assembly,with 12cm or 8cm both OK)
Sliding rail	18" ball bearing sliding rail (option)
Color	Black / Blue front panel
Operation Humidity (Non-condensing)	Up to 90%
Packing Measurement CBF / CBM	2.1 / 0.059
Packing N.W / G.W	5.5KGS /6.5KGS

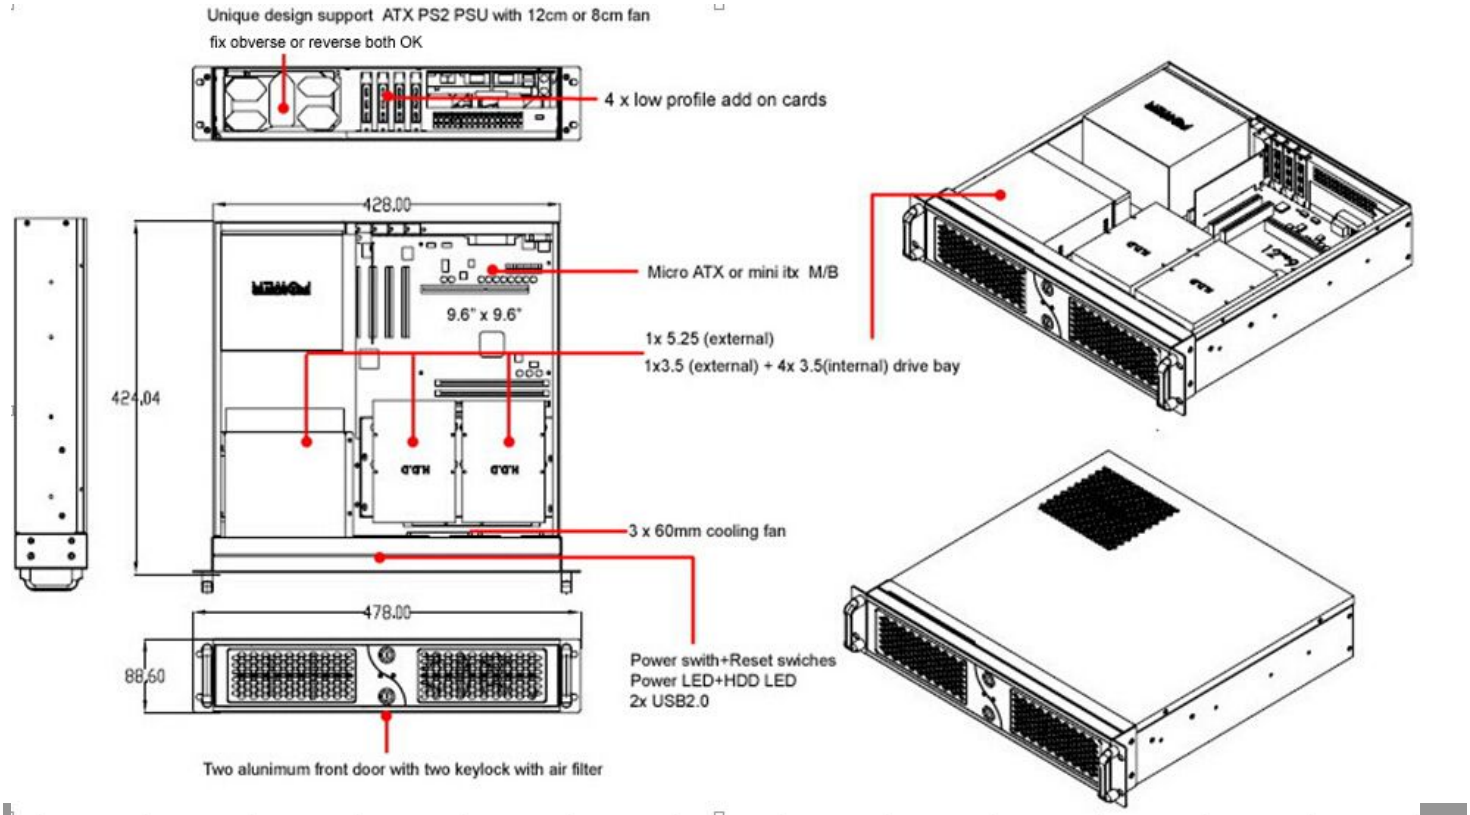


Option: Three-Sections Heavy-Duty Solid Ball-Bearing Sliding Rails

Model: RB18


Features: Universal Design to match almost all chassis on market, Heavy-Duty Slide Ball Bearing
Built-in stop-latch, lock chassis in extended position for easy access ,
Simply pressing on the plastic levers on each side and slide your case back into the cabinet


Warranty: 1 Year



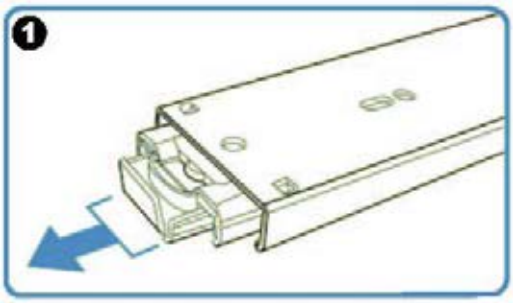


(Pull the center slide all the way out until it reaches the end)







You will see a locking clip at the end point of the center slide.
Plush it down and unlock the center slide.

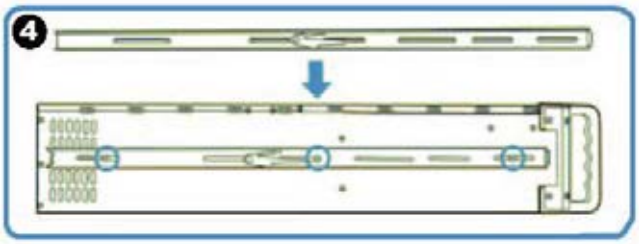


Now put the center slide right next to the rackmount chassis. You should be able to find screw holes on both sides of chassis. Holes are used for mounting the center slide. Later the center slide will be use for attaching the sliding rail.

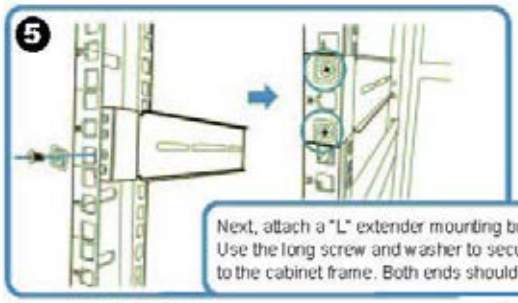


Next, attach a "L" extender mounting bracket on to the cabinet.
Use the long screw and washer to secure the "L" extender bracket or to the cabinet frame. Both ends should have the extender bracket.

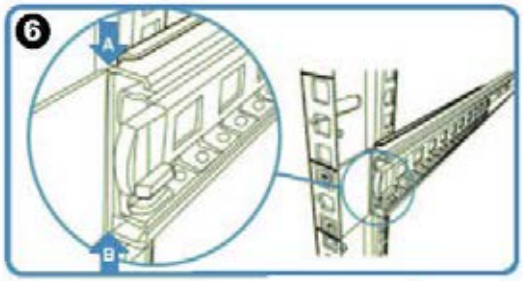

Align front outer rail to the indent of L bracket between Point A & B.

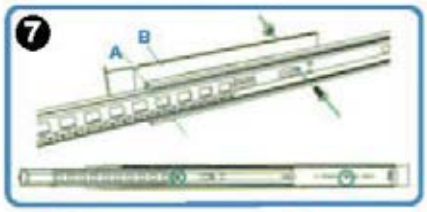

Secure outer rail to L bracket with crews and nuts.



Repeat previous steps to secure sliding rails on both sides.



Reattach inner rail back to center rail.